


LIMESTONE 20 Outboard Centre Console

STANDARD SPECIFICATIONS - OUTBOARD

Standard specifications may change at any time without prior notice.

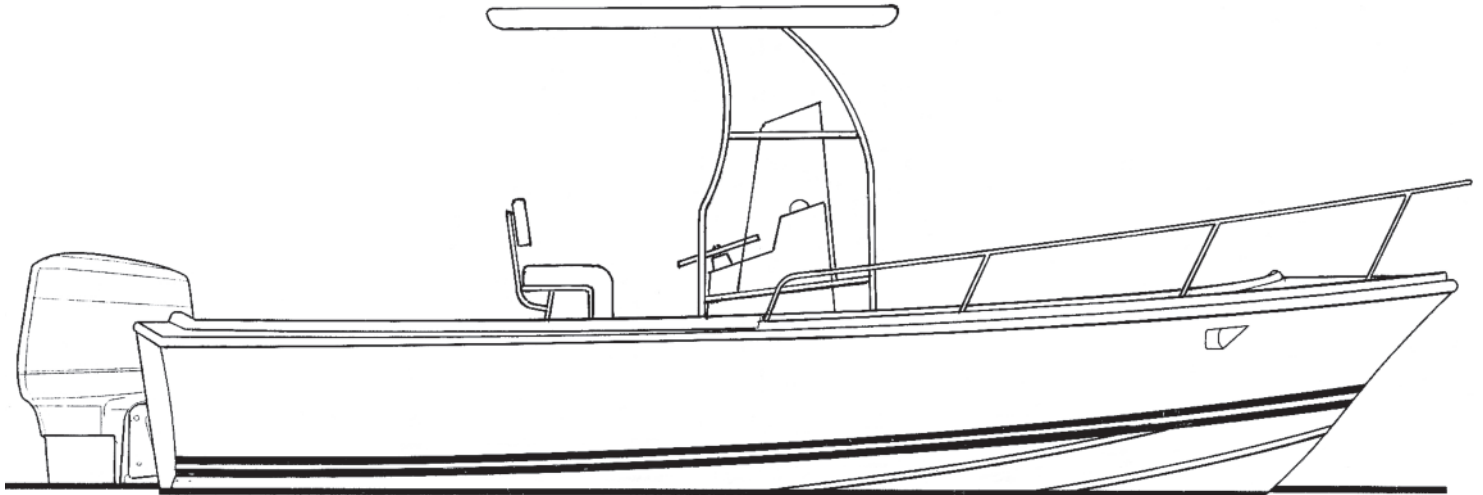

Designer: Mark Ellis Design Limited



Principal Dimensions

- LOA** 20'0" (6.10 m)
- Maximum Beam** 8'0" (2.44 m)
- Draft** 1'2" (0.36 m)
- Displacement** 2,600 lbs. (1.18 t)

Hull Construction

- Single piece, balsa cored, hand lay up fiberglass construction
- Smoke white hull
- Molded in dark blue chine stripes
- Heavy duty vinyl rub rail with rope inlay at hull-deck joint
- Anodized aluminum corner castings
- Bow and stern towing eyes
- Structural fiberglass grid bonded to hull

Deck and Interior

- Diamond non-skid pattern on all flat surfaces
- Access hatches to fuel tank and stowage lockers
- Stainless steel bow mooring cleat
- Two stainless steel bow mooring chocks
- Stainless steel midship mooring cleats
- All cleats through bolted with backup plates
- Stainless steel steering wheel
- Upholstered seats with stowage underneath
- Open side storage bins with shelves

- Guttered cockpit sole and transom drain plugs with flapper valves to permit self-draining
- Lockable access door to forward storage compartment

Electrical

- Automatic electric bilge pump
- Breaker panel
- Horn

Fuel

- 75 U.S. gallon (280 L) aluminum fuel tank

MEDEIROS BOAT WORKS LIMITED

210 Burnhamthorpe Road East, Oakville, Ontario, Canada L6H 7B5
Tel: (905) 257-0151 • Fax: (905) 257-0252
E-mail: limeston@interlog.com • Website: www.medeiros-boatworks.com

LIMESTONE[®]
by *Medeiros*